

City of Grand Island

Tuesday, May 22, 2012 Council Session

Item G11

#2012-131 - Approving Integrated Resource Plan - 2012

Staff Contact: Tim Luchsinger

Council Agenda Memo

From: Tim Luchsinger, Utilities Director

Meeting: May 22, 2012

Subject: Integrated Resources Plan, 2012

Item #'s: G-11

Presenter(s): Tim Luchsinger, Utilities Director

Background

The Utilities Department receives a portion of its power supply from the hydrogeneration projects on the Missouri River. The operation and administration of the hydrogeneration power is done by an agency of the Federal Government, the Western Area Power Administration (WAPA). In order to maintain this power contract with a federal agency, the Department is required to comply with applicable federal regulations. Part of those regulations requires the periodic submittal of an Integrated Resources Plan (IRP) to be submitted under specific formatting and topics.

Discussion

The Integrated Resource Plan is power supply study reporting the current operating conditions and anticipated future electric needs. It contains analyses of the City's current load growth, recent past power supply decisions, option evaluations, and planned future actions to meet continued load growth and to optimize generation mix for the most economical power supply.

IRP 2012 reviews the affects of past load growth and power supply analyses done in IRP 2002 and IRP 2007, and looks to the future as Grand Island's electric demand continues to grow with the City. It is required to be submitted to WAPA by May 31, 2012.

Alternatives

It appears that the Council that the following alternatives concerning the issue at hand. The Council may:

- 1. Move to approve
- 2. Refer the issue to a Committee

- 3. Postpone the issue to a future date
- 4. Take no action on the issue

Recommendation

City Administration recommends that the Council approve the Integrated Resources Plan, 2012 for submittal to the Western Area Power Administration.

Sample Motion

Move to approve the Integrated Resources Plan, 2012 for submittal to the Western Area Power Administration.

GRAND ISLAND UTILITIES

INTEGRATED RESOURCE PLAN

Prepared for: Western Area Power Administration

Prepared by:
Grand Island Utilities

April 2012

1.0 Background Information

The Grand Island Utilities Department (GIUD) generates and distributes electricity and water to homes, businesses, and industries in and near Grand Island, Nebraska. Within the boundaries of its 83 square mile service area the Utilities Department supplies approximately 24,500 customers with electrical service, and provides water distribution service to approximately 15,700 customers. GIUD is owned by the customers it serves and is governed by the Grand Island City Council as a financially self-supporting entity of the City of Grand Island. No taxes are used for the operation of the Utilities Department as all departmental operations are financed through electric and water sales revenue.

2.0 Integrated Resource Plan History

The Energy Policy Act of 1992 mandated that electric utilities periodically produce and adopt an Integrated Resource Plan (IRP). Grand Island's Integrated Resource Planning process began in 1996. This consisted of initial consideration of: 58 conservation options, 3 load building options, 2 load management options, and 18 supply side options. After screening, 9 supply side options and 5 demand side programs were examined in greater detail. Ultimately, supply side expansion was the realistic option. Subsequent Integrated Resource Plans, in 2001 and 2003, examined supply side options.

The initial concern was to satisfy an impending capacity need. IRP, 2001 resulted in the addition of two 34 MW (summer rating) combustion turbines at Burdick Station. IRP, 2001 was adopted by the Grand Island City Council on March 27, 2001, followed by a Public Hearing at the Nebraska Power Review Board on May 4, 2001.

IRP, 2003 considered the integration of 30 MW of Omaha Public Power District's (OPPD) Nebraska City Unit #2 (NC2) participation with GIUD generation. In the decade following the 2009 commissioning, Grand Island anticipates saving a total of \$37 million, by not operating Burdick Station steam units on natural gas. In addition to the savings, GIUD gained additional generating capacity. After construction contracts were negotiated by OPPD, GIUD's participation share increased to 33 MW.

Certainty of Whelan Energy Center #2 (WEC2) project was not established until 2006, IRP, 2007 documented the consideration of issues which lead to contract ratification. Integrated Resource Plan, 2007 (IRP, 2007) was a continuation of the financial analysis presented in IRP, 2003. There were two significant differences which prevented WEC2 from being as cost effective as NC2. First, capital costs experienced a rapid and unexpected escalation. Second, the NC2 analysis had already claimed the most lucrative displacement of natural gas fired

Page 2 of 14

energy; this is recognized with IRP, 2003 stating that additional base-load generation will not be needed until after 2014.

The concern of IRP, 2007 was the fine-tuning of a planning window with other regional utilities, in contrast to IRP, 2003 which considered acquisition of base-load resources and IRP, 2001's concern with satisfying an impending capacity deficit.

Since the release of IRP, 2007, the economy has gone through a significant decline. This decline has reduced load growth and pushed out the need for additional capacity from 2018 to approximately 2030. IRP, 2012 provides a summary of current capacity conditions and estimates for future capacity needs. With the addition of NC2 and WEC2 in recent years, Grand Island's capacity is satisfied for the foreseeable future.

3.0 Existing Supply

Grand Island Utilities owns and operates two power stations with a combined rated capability of 273 megawatts (MW). GIUD also participates in several jointly utilized facilities. The capability and fuel mix of the generating capacity at each site is summarized in Table 3-1. The power stations are individually summarized in the following subsections.

Summary of Grand Island Utilities Existing Power Supply				
Station & Unit No.	In-Service Year	Primary Fuel	Rated Capability MW	
Platte Generating Station	1982	Coal	100.0	
Burdick Station Steam Unit #1	1957	Natl Gas	16.0	
Burdick Station Steam Unit #2	1963	Natl Gas	22.0	
Burdick Station Steam Unit #3	1972	Natl Gas	54.0	
Burdick Station Combustion Turbine #1	1968	Natl Gas	13.0	
Burdick Station Combustion Turbine #2	2003	Natl Gas	34.0	
Burdick Station Combustion Turbine #3	2003	Natl Gas	34.0	
Nebraska City Unit #2 – Joint	2009	Coal	33.0	
Whelen Energy Center Unit #2 – Joint	2011	Coal	15.0	
Ainsworth Wind Farm – Joint	2005	Wind	1.0	
Elkhorn Ridge Wind Farm – Joint	2009	Wind	1.0	
Laredo Ridge Wind Farm – Joint	2011	Wind	1.0	
WAPA Firm - Contract	1991	Hydro	9.0	
TOTAL			333.0	

Table 3-1

Page 3 of 14

3.1 Platte Generating Station

The Grand Island Electric Utility's primary power plant is the Platte Generating Station (PGS). The facility consists of one coal fired unit that went into commercial operation in 1982 with a net output of 100 MW. PGS has enjoyed a high level of reliability since going into commercial operation in 1982. During the past five years, PGS has had a unit availability of 93.7%, with a forced outage rate of 0.34% and operating at a capacity factor of 70.9%.

3.2 Burdick Station

The Burdick Station includes three steam turbine generators and three gas turbine generators. The station was placed in service in 1957 with additional units placed in service in 1963, 1968, 1972 and 2003. All units are equipped for natural gas and fuel oil operation.

Since the placement of the Platte Generating Station into service in 1982, the Burdick steam units have moved from intermediate service to peaking reserve capacity. Over the past five year period, the Burdick Station generation averaged only 0.4% of the total Grand Island Electric System generation.

3.3 Nebraska City Unit #2

Beginning in 2009, GIUD began receiving power from Omaha Public Power District's (OPPD) Nebraska City Unit #2. This unit is a 660 MW coal-fired power plant. It is one of two coal-fired power plants located on the site just south and east of Nebraska City, NE.

3.4 Whelen Energy Center Unit #2

Beginning in 2011, GIUD began receiving power from Public Power Generation Agency's (PPGA) Whelen Energy Center Unit #2. This unit is a 220 MW coal-fired power plant. It is one of two coal-fired power plants located on the site just east of Hastings, NE.

3.5 Wind Farm Participation

GIUD has made efforts to be involved in developing technologies regarding renewable energy. Presently, the most cost effective form of renewable energy is large scale wind energy. Since 1998, GIUD has participated with other Nebraska utilities in wind turbine projects. Presently, the state of Nebraska doesn't have a Renewable Portfolio Standard

Page 4 of 14

(RPS) and GIUD doesn't have an internal renewable energy goal. However, Nebraska Public Power District (NPPD), for example, maintains an internal goal of 10% renewable energy by 2020. If GIUD were to set a similar goal, a total of approximately 25 MW of Wind capacity would be needed. In 2011, 0.876% of GIUD's energy needs were generated by wind energy.

3.5.1 Springview Project

GIUD first became involved with wind energy in 1998 with the development of the "Nebraska Distributed Wind Generation Project" or NDWG, often referred to as the "Springview Project" because of its proximity to that community in north central Nebraska. The project included two 750 kilowatt wind turbines installed near Springview, Nebraska. Half of the cost of the project was funded by a grant from the Electric Power Research Institute/Department of Energy-Turbine Verification Program. NDWG was a joint project among Nebraska utilities that included Auburn Utilities, GIUD, KBR Power District, Lincoln Electric System, the Municipal Energy Agency of Nebraska and NPPD. GIUD received an average of six megawatt hours of energy per month from NDWG. Due to rising maintenance costs, increasing equipment failures and unit downtime, this facility was decommissioned in August of 2007. Including the salvage value of the turbines, the final production cost was approximately \$23/megawatt hour. Two new direct drive wind turbines were recently installed at the Springview site as another joint project that GIUD is pursuing participation in.

3.5.2 Ainsworth Project

In addition to NDWG, GIUD is also a participant in the Ainsworth Wind Energy Farm (AWEF) near Ainsworth, NE. This facility was constructed in 2005 and consists of thirty-six 1.65 megawatt turbines for a total project output of 59.4 megawatts. GIUD has a one megawatt participation level in AWEF. AWEF is another joint project that is operated by Nebraska Public Power District, and includes participation by Omaha Public Power District, the Municipal Energy Agency of Nebraska, GIUD, and JEA of Jacksonville, Florida. Since the start of AWEF, GIUD has received an average of 274 megawatt hours of energy per month. Currently, the total production cost of power received from AWEF is approximately \$47 per megawatt hour.

3.5.3 Elkhorn Ridge

Elkhorn Ridge Wind, LLC (Elkhorn) is an 80 MW wind farm located near the town of Bloomfield in northeast Nebraska. It consists of twenty-seven 3 megawatt

Page 5 of 14

turbines. It began commercial operation January 1, 2009. Unlike AWEF, Elkhorn is a privately owned facility. NPPD entered into a Power Purchase Agreement with Elkhorn to purchase all power produced by the facility. GIUD then signed a Power Sales Agreement with NPPD to purchase a 1 MW share of the power produced at Elkhorn.

3.5.4 Laredo Ridge

Laredo Ridge Wind, LLC (LRW) is an 80 MW wind farm located near the town of Petersburg in northeast Nebraska. It consists of fifty-four 1.5 megawatt turbines. It began commercial operation February 1, 2011. Similarly to Elkhorn, LRW is a privately owned facility. NPPD entered into a Power Purchase Agreement with LRW to purchase all power produced by the facility. GIUD then signed a Power Sales Agreement with NPPD to purchase a 1 MW share of the power produced at LRW.

3.6 Purchase Power Agreement with WAPA

GIUD has a long-term agreement with the Western Area Power Administration (WAPA) providing capacity and energy to the City. The firm energy and capacity provided by WAPA is summarized in Table 3-2.

Month	Energy (kWh)	Capacity (KW)
January	2,763	4,790
February	2,721	5,113
March	2,237	4,790
April	2,450	4,790
May	2,547	6,182
June	3,504	9,153
July	3,294	9,153
August	3,924	9,057
September	2,702	6,709
October	2,442	5,751
November	2,437	4,790
December	2,440	4,790

Table 3-2

3.7 Station Capacity Factors

PGS is on-line most hours of the year, and provides the majority of electric energy for GIUD retail customers. The Burdick Station generating units operate primarily in peaking mode. Burdick Station has run fewer hours during the past several years with the addition of NC2 and WEC2. Table 3-3 shows the percentage supply for all GIUD resources and capacity factor for each GIUD owned unit for the past four years.

	20	008	2009		2010		2011	
	%	Capacity		Capacity		Capacity		Capacity
	Supply	Factor	% Supply	Factor	% Supply	Factor	% Supply	Factor
PGS	91.61%	75.81%	82.78%	67.54%	75.68%	64.33%	74.05%	63.35%
Burdick								
Steam Unit	0.01%	0.07%	0.03%	0.18%	0.01%	0.03%	0.01%	0.03%
#1								
Burdick								
Steam Unit	0.04%	0.14%	0.07%	0.26%	0.01%	0.03%	0.01%	0.03%
#2								
Burdick								
Steam Unit	0.00%	0.00%	0.63%	0.95%	0.00%	0.00%	0.00%	0.00%
#3								
Burdick Gas	0.01%	0.06%	0.01%	0.06%	0.06%	0.40%	0.03%	0.23%
Turbine #1								
Burdick Gas	0.85%	2.06%	0.16%	0.39%	0.08%	0.21%	0.04%	0.09%
Turbine #2								
Burdick Gas	0.57%	1.39%	0.13%	0.31%	0.06%	0.15%	0.12%	0.31%
Turbine #3								
NC2	0.00%	N/A	14.88%	N/A	23.00%	N/A	27.00%	N/A
WEC2	0.00%	N/A	0.00%	N/A	0.00%	N/A	3.40%	N/A
Wind	0.42%	N/A	0.72%	N/A	0.75%	N/A	1.39%	N/A
WAPA	4.62%	N/A	4.67%	N/A	4.48%	N/A	4.45%	N/A
Purchases /Sales	1.87%	N/A	-4.09%	N/A	-4.13%	N/A	-10.50%	N/A

Table 3-3

4.0 Public Input

GIUD operates under a Mayor - Council form of government. Formal public meetings are conducted twice monthly. In addition, there are frequent planning sessions, open to the public, during which no formal action may be taken. Meetings are advertised and reported by the local

Page 7 of 14

news media. Proceedings are also broadcast on low power City television, with cable TV access. All decisions regarding additional capacity acquisition must be approved by the City Council.

5.0 Environmental Considerations

5.1 Emissions Limits

The Clean Air Act of 1990, and in particular the Acid Rain Rule, placed emissions limitations on generating facilities for SO2 and NOx, and required the installation of continuous emissions monitoring systems (CEMS) to monitor CO2, NOx, SO2 and opacity for proving compliance and providing accounting for the above mentioned emissions. Burdick Units B-3, GT-2, and GT-3 and Platte Unit 1 are subject to the Acid Rain Rule.

Burdick Generating Station burns natural gas and oil and only emits a few tons per year of SO2.

Under the Acid Rain Rule, Platte Generating Station (PGS) Unit 1 has SO2 allowances for 2,926 tons of emissions per year. In the calendar year 2011, PGS Unit 1 emitted 2,301 tons of SO2 which equates to 0.67 pounds of SO2 per million Btus of heat input. Under Acid Rain rule, PGS is required to hold SO2 allowances equal to their emissions. This is accomplished by banking unused allowances from previous years.

A summary of the monitored pollutant limits and their averages are listed in Table 5-1.

Pollutant	3 Year Average 2009-2011	Emission Limitation
NOx –annual average	0.343 lb/MMBtu	0.40 lb/MMBtu
SO2 – 3 hour average	0.694 lb/MMBtu	1.2 lb/MMBtu
Opacity	3.3 %	20% 6-minute average

Table 5-1

The Nebraska Department of Environmental Quality (NDEQ) insures these and other permitted requirements are met under their Title V Air Permit Program. Recent air inspections performed by NDEQ indicate GIUD is compliance with all conditions of plant air operating permits.

5.2 Regulations

Over the past year the electric utility industry has seen increased regulatory action from the Environmental Protection Agency (EPA). The EPA published a new regulation for power plant

Page 8 of 14

air emissions on July 7, 2011, the Cross State Air Pollution Rule (CSAPR), which was scheduled to replace the Clean Air Interstate Rule on January 1, 2012. The rule has lowered the annual amount of nitrous oxides (NOx) emissions that can be released as a result of the combustion process in the plant boiler, and this lower amount becomes the limiting constraint on the generating output of the Platte Generating Station, about 45% of its maximum capacity. This loss in generating capacity must be replaced by higher cost options of purchasing power from the regional market or using the gas-fueled facilities at Burdick Station. requirements of the CSAPR, the plant engineering staff researched methods to reduce the amount of NOx released from the boiler. Installing new low NOx burners with separate over-fire air ducts to lower the NOx emission rate from the unit was evaluated to be the long-term solution to allow full operating capacity for the plant The project includes furnishing and installing all of the combustion system components necessary to lower the NOx emissions from the Platte boiler to a rate of 14 #/mmBtu, or about one-fourth of its current permitted rate. The system is planned to be installed during a plant maintenance outage in the last quarter of 2012. Although the CASPR is currently stayed pending court action, staff has elected to continue with the long term compliance plans in expectation of a final ruling mid-year 2012.

On February 16, 2012 the EPA published the Mercury and Air Toxics Standards (MATS), requiring the maximum achievable control technology for mercury and other hazardous pollutants from electric generating units. Compliance is required by March, 2015, although an additional one year for compliance may be granted by individual states. This rule is independent from the CSAPR proceedings.

To achieve long-term compliance for MATS, it is anticipated that GIUD will need to install a fabric filter, carbon injection system, and either a dry sorbent injection or a dry scrubber at Platte Generating Station, along with associated by-product removal systems and disposal sites, in the next three to four years. It is estimated that these modifications will cost the utility approximately \$35 Million and take 3 to 5 years for financing, design, and construction. Current plans are to complete this installation during the last quarter of 2014 to coincide with a scheduled plant maintenance outage. This will provide a margin for the implementation of the system and minimize plant downtime. Currently GIUD is working with outside contractors to fully evaluate control equipment options.

Other rules in various stages of promulgation are anticipated to have a potential impact on utilities. They include revisions to the National Ambient Air Quality Standards (NAAQS), the clean water effluent guidelines, and coal combustion waste management rules. In late March 2012 the EPA decided to not make an adjustment to the current NOx and SOx NAAQS. States

Page 9 of 14

now have the duty to develop State Implementation Plans or SIPs outlining to the EPA how they anticipate meeting ambient air standards. Nebraska currently meets all NAAQS but will be making changes to the SO2 SIP pending EPA approval. With a high degree of uncertainty surrounding future regulatory action GIUD staff closely monitors the regulatory rulings.

6.0 Conservation/Demand Side Management

Nebraska consistently ranks within the top ten lowest electricity cost states in the nation. This low cost along with abundant excess capacity makes conservation and demand side management programs difficult to justify. The low costs are a direct result of abundant low cost coal generation. If EPA regulations continue to be implemented, limiting the use of and increasing the cost of coal generation, Nebraska utilities could see a significant shift in average prices. Conservation and demand side management will continue to be examined in the future as additional environmental regulations are added. There may be a point in the future where an aggressive conservation program is economically feasible.

7.0 Excess Power Sales

GIUD has had an abundance of excess power during the past few years. When possible, this power is sold to surrounding utilities. Arrangements have been made with several utilities in an effort to maximize sales of excess power. The down economy and the recent commercial operation of several large baseload units in the area have made the market extremely soft. In addition, Southwest Power Pool (SPP), the Regional Transmission Operator (RTO) for Nebraska, is moving toward an integrated market to begin in 2014. These market changes have the potential of making the current way of selling excess power obsolete. Because of these changes, GIUD is pursuing load and generation registration with SPP in order to participate in the market. This has the potential for maximizing profits on excess power during off peak periods as well as reducing energy prices for customers.

8.0 Load Projections

GIUD makes monthly projections of demand and energy requirements. A times series is used based upon historical load. This series originally included data beginning in 1978. However, it was apparent that including the late 1970's time frame produced an inaccurate projection due to the aggressive addition of air conditioning load during that period of time. Since 2007, the time series is based upon data beginning in 2000. This provides a much more

Page 10 of 14


accurate projection. Results are graphically displayed in order to identify anomalies which may evolve into trends. The graphs are included as Appendix A. Table 8-1 shows the current projections out to 2025 with five years of historical data.

	Summer	Winter
Year	Peak	Peak
	Demand	Demand
2007	159.6 MW	107.6 MW
2008	151.8 MW	114.4 MW
2009	153.6 MW	117.6 MW
2010	166.1 MW	118.3 MW
2011	167.9 MW	110.5 MW
2012	170 MW	120 MW
2013	172 MW	123 MW
2014	174 MW	126 MW
2015	176 MW	130 MW
2016	179 MW	133 MW
2017	181 MW	137 MW
2018	183 MW	140 MW
2019	185 MW	144 MW
2020	187 MW	148 MW
2021	190 MW	152 MW
2022	192 MW	156 MW
2023	194 MW	160 MW
2024	196 MW	165 MW
2025	199 MW	169 MW

Table 8-1

With the addition of NC2 and WEC2, the use of Burdick generation for peaking is minimized. At the current load growth rate, Burdick generation will not see pre NC2 and WEC2 usage until approximately 2025. From a capacity standpoint, GIUD has plenty of capacity to satisfy needs beyond 2025. See graph 8-2 below.

Page 11 of 14

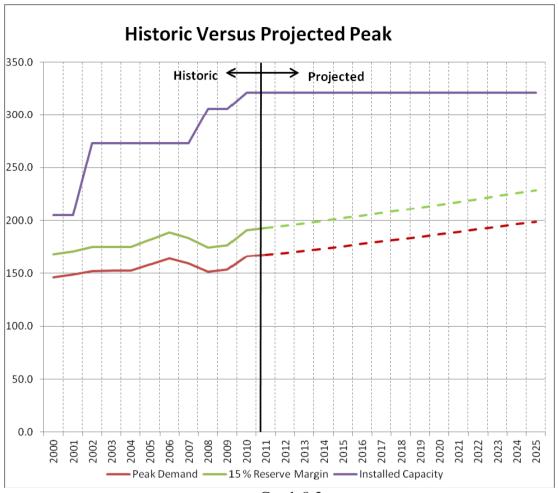

Graph 8-2


9.0 Reliability

GIUD tracks reliability statistics in an effort to curb negative trends and attract new industry. GIUD maintains a high level of reliable electric service. The current reliability statistics are shown in Appendix B.

10.0 Historic And Average Power Cost


Coal and natural gas prices have experienced an incline over the past several years. Coal prices, historically, have been much more constant than natural gas prices. GIUD is hesitant to rely heavily on natural gas fired generation due to the fuel volatility. Graph 10-1 below shows the historical prices of GIUD coal and natural gas generation in \$/MWh during the past seven years:

Page 12 of 14

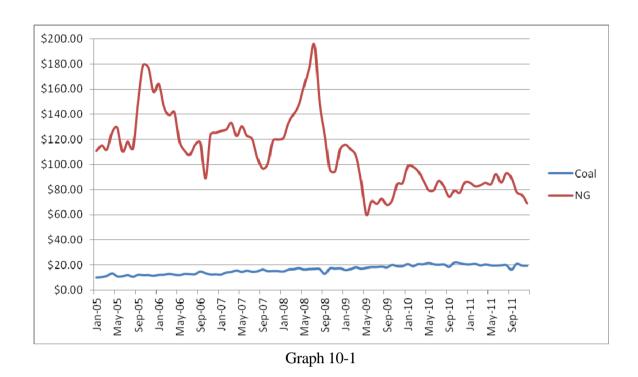

GIUD expects PGS coal generation costs to go up during the next several years due to new EPA emissions standards and regulations. However, NC2 and WEC2 prices should remain fairly flat since both units are new and already meet the latest proposed regulations.

For years, average cost of power for GIUD customers stayed consistently in the \$10 per MWh price range. This was due to low cost local generation and low cost supplemental power available for purchase from surrounding utilities. During the past eight years, average cost of power has increased with a current average cost approaching \$35 per MWh. This rise is due to several factors including the addition of NC2 and WEC2 and associated transmission and debt service, increased transportation cost for coal and an increase in the price of coal itself. Graph 10-2 shows the rise in both coal prices and corresponding power prices since 1998.

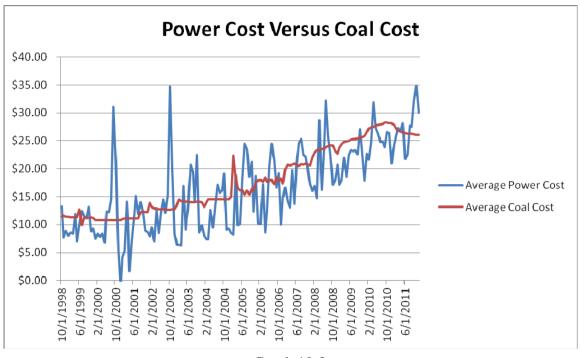

Graph 10-2

With NC2 and WEC2 fully incorporated into the average power cost, it is anticipated that, despite rising PGS generation costs, prices will stabilize in the near future. However, this could drastically be impacted by more stringent EPA coal restrictions.

11.0 Implementation Plan

With the current trends and the recent addition of NC2 and WEC2 capacity, GIUD has enough excess capacity to last well beyond 2020. This additional capacity should allow GIUD to obtain some profit by selling additional energy utilizing the current and future energy markets. Load will continue to be trended and additional capacity will be added as needed. However, at the present time, additional capacity is not expected to be needed until beyond 2025.


Page 14 of 14


APPENDIX "A"


>
MMARY
⊴
⋛
2
<u></u>
<u>></u>
Ć
ď
Щ
~
ч С
ב
4
⊽ ≥
Į
>
Ŧ
I L C
Z
<u>C</u>
2


26-Mar-12


2011	115.2 MW 102.2 MW 96.9 MW 128.9 MW 152.0 MW 165.9 MW 167.9 MW 167.9 MW 108.2 MW 99.2 MW	10.5 MW 110.5 MW	58,583 MWh 52,903 MWh 52,903 MWh 65,129 MWh 81,118 MWh 76,384 MWh 57,864 MWh 56,189 MWh 56,189 MWh 56,462 MWh 749,417 MWh	21%
2010	117.6 MW 105.5 MW 97.8 MW 123.6 MW 147.5 MW 154.0 MW 166.1 MW 106.8 MW 107.2 MW	118.3 MW 118.3 MW 64 698 MWh	57,771 MWh 57,833 MWh 51,802 MWh 56,306 MWh 67,445 MWh 76,550 MWh 78,272 MWh 59,488 MWh 59,488 MWh 64,182 MWh 64,182 MWh	51%
2009	110.0 MW 103.1 MW 103.6 MW 99.1 MW 114.4 MW 153.6 MW 150.1 MW 145.8 MW 113.0 MW 97.3 MW 97.3 MW 93.6 MW	193.0 MWV 117.6 MW 62 522 MWh	54,233 MWh 56,971 MWh 52,619 MWh 62,748 MWh 70,688 MWh 69,103 MWh 55,976 MWh 55,976 MWh 55,947 MWh 54,841 MWh	23%
2008	107.6 MW 103.4 MW 99.2 MW 103.2 MW 143.8 MW 147.4 MW 118.6 MW 95.4 MW 100.4 MW	191.8 MWV 114.4 MWV	56,800 MWh 56,122 MWh 53,050 MWh 64,623 MWh 76,582 MWh 71,321 MWh 57,637 MWh 57,637 MWh 53,983 MWh 53,983 MWh 53,982 MWh	54%
2007	102.2 MW 104.8 MW 95.0 MW 117.0 MW 142.0 MW 154.8 MW 132.2 MW 112.8 MW 97.4 MW	107.6 MW	54,963 MWh 53,850 MWh 50,590 MWh 63,787 MWh 77,454 MWh 77,454 MWh 57,710 MWh 57,710 MWh 53,171 MWh 60,935 MWh	51%
2006	90.6 MW 101.8 MW 91.0 MW 96.8 MW 123.6 MW 144.2 MW 164.2 MW 1659.0 MW 108.4 MW 102.6 MW 100.0 MW	104.8 MW 104.8 MW 53.447 MWh	51,135 MWh 54,150 MWh 48,489 MWh 56,630 MWh 77,657 MWh 71,163 MWh 52,524 MWh 53,737 MWh 52,799 MWh 56,079 MWh	48%
2002	99.8 MW 94.0 MW 90.4 MW 125.8 MW 144.6 MW 157.6 MW 157.8 MW 135.2 MW 135.2 MW 106.4 MW	106.4 MW 106.4 MW 57 176 MWh	48,203 MWh 52,496 MWh 48,937 MWh 55,069 MWh 65,632 MWh 71,712 MWh 60,114 MWh 52,738 MWh 50,969 MWh 57,647 MWh	20%
2004	96.6 MW 92.2 MW 87.4 MW 109.4 MW 133.4 MW 152.4 MW 145.8 MW 131.4 MW 95.8 MW 95.8 MW	192.4 MW 99.2 MW 53 931 MWh	49,764 MWh 49,963 MWh 47,691 MWh 52,884 MWh 57,708 MWh 63,496 MWh 56,377 MWh 49,266 MWh 49,266 MWh 54,843 MWh	49%
2003	93.8 MW 89.2 MW 92.8 MW 105.3 MW 138.4 MW 152.4 MW 150.7 MW 150.7 MW 150.7 MW 99.2 MW 99.2 MW 94.8 MW	99.0 MW	46,888 MWh 49,907 MWh 49,908 MWh 49,796 MWh 75,814 MWh 72,814 MWh 52,581 MWh 50,359 MWh 50,359 MWh 52,326 MWh	49%
2002	87.0 MW 88.4 MW 88.8 MW 100.4 MW 125.7 MW 140.1 MW 152.3 MW 135.2 MW 135.2 MW 103.5 MW 91.0 MW	98.3 MW 98.3 MW 98.3 MW	45,314 MWh 49,645 MWh 46,644 MWh 49,186 MWh 64,599 MWh 75,713 MWh 67,373 MWh 54,314 MWh 49,274 MWh 47,409 MWh 50,692 MWh 650,691 MWh	49%
YEAR	JAN FEB MAR APR JUN JUL AUG SEP OCT NOV	WIN. MAX.	FEB MAR APR JUN JUL AUG SEP OCT NOV DEC TOTAL	ANNUAL LF

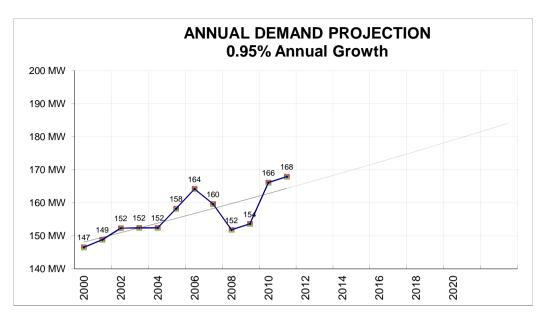


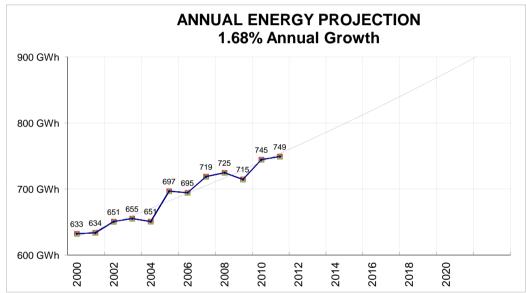


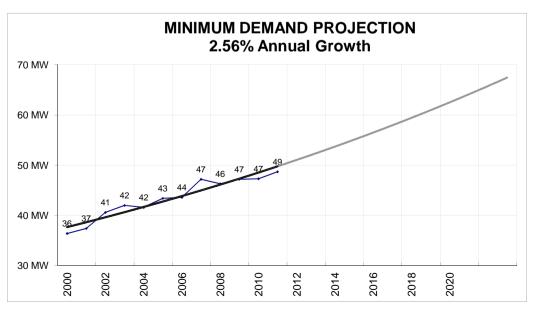


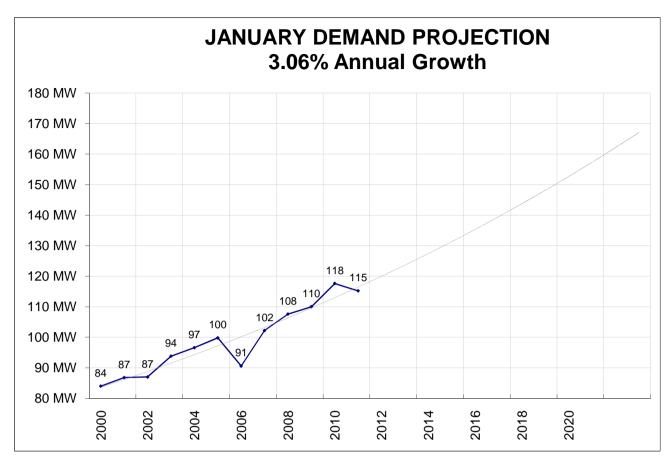


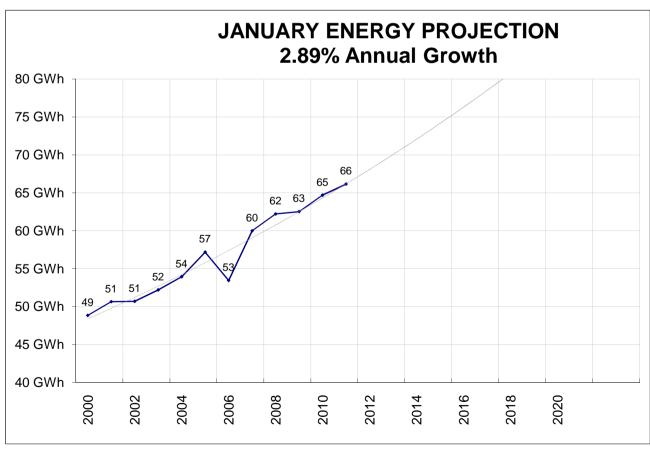


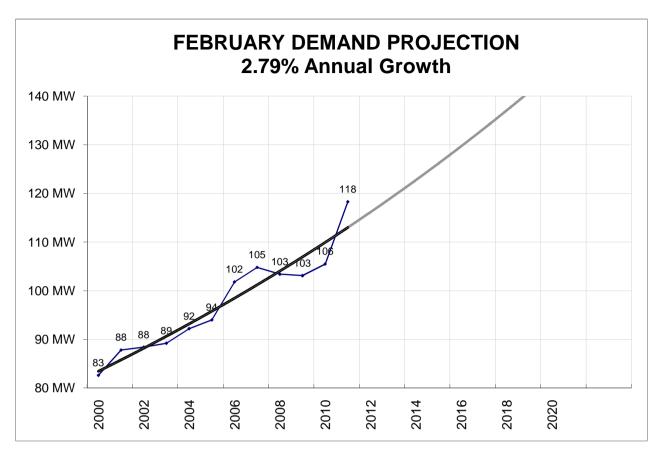


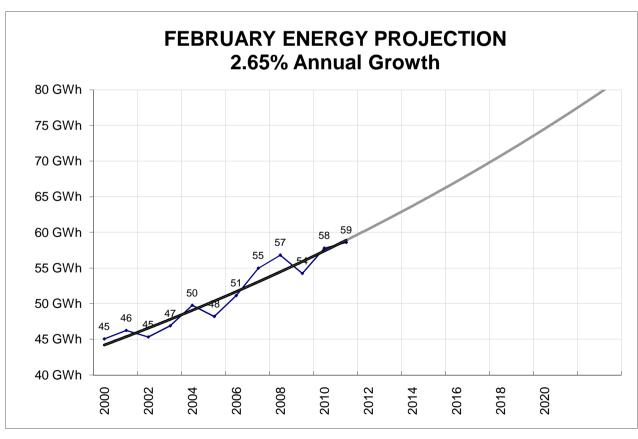


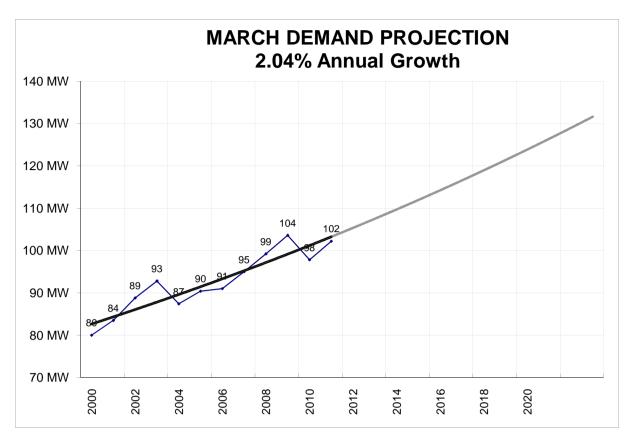


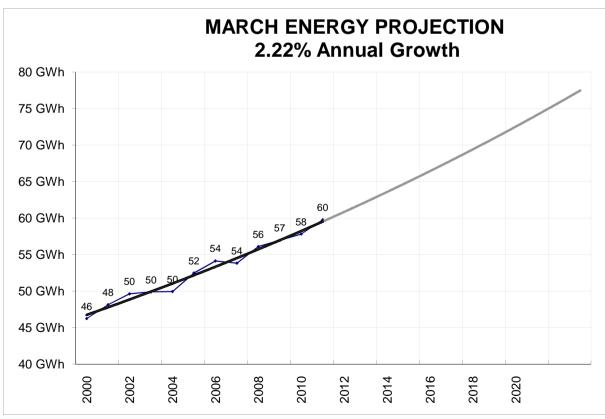


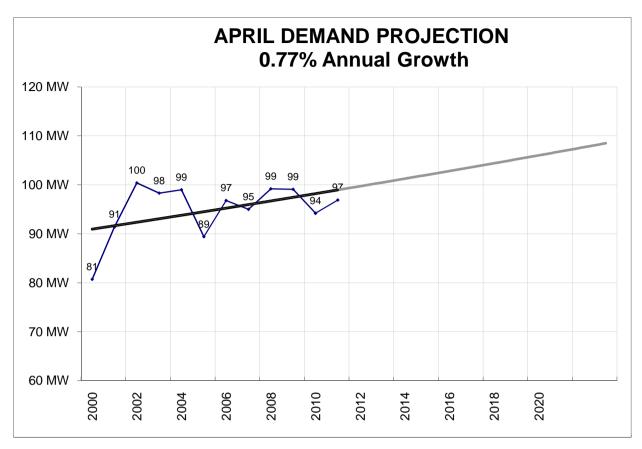


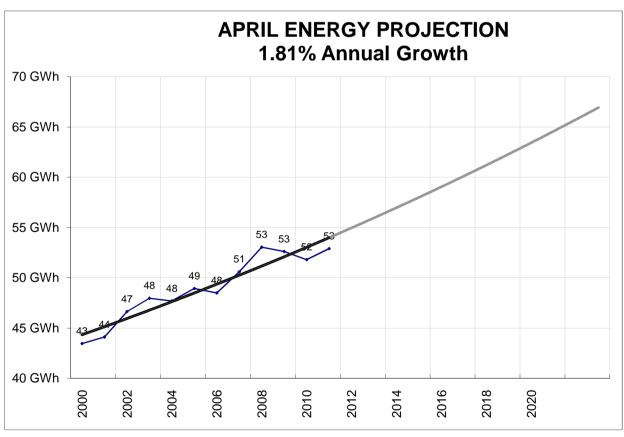


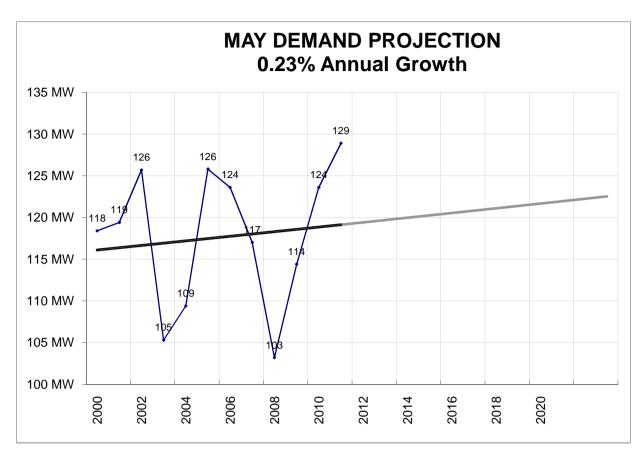


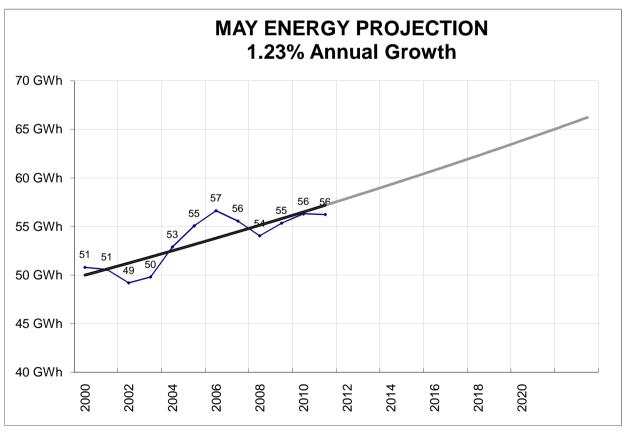


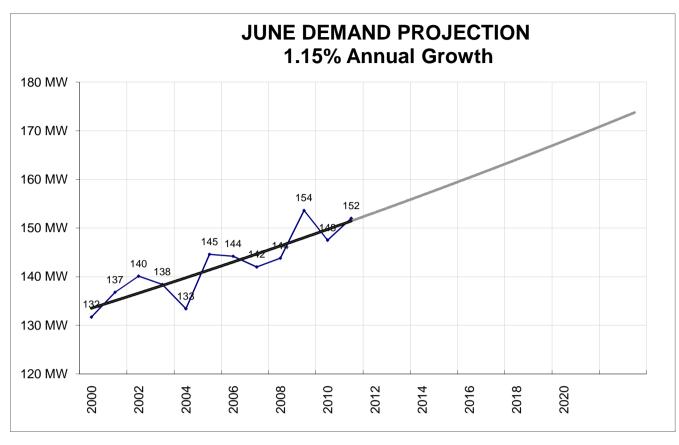


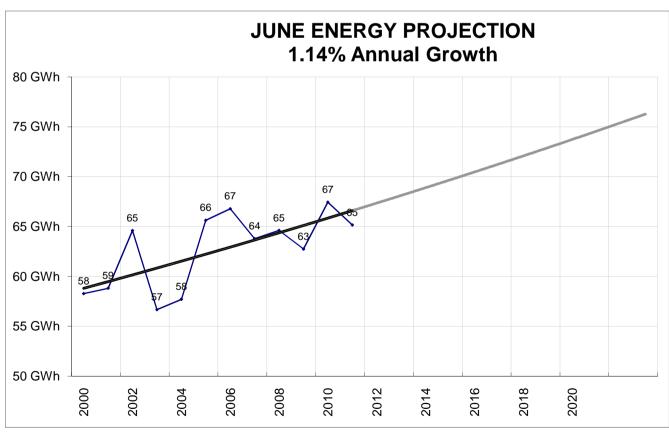


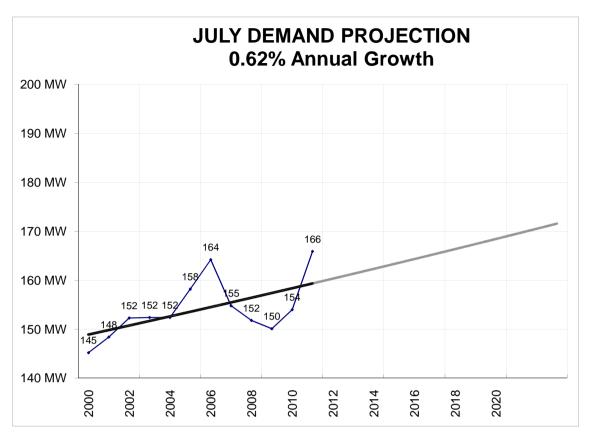


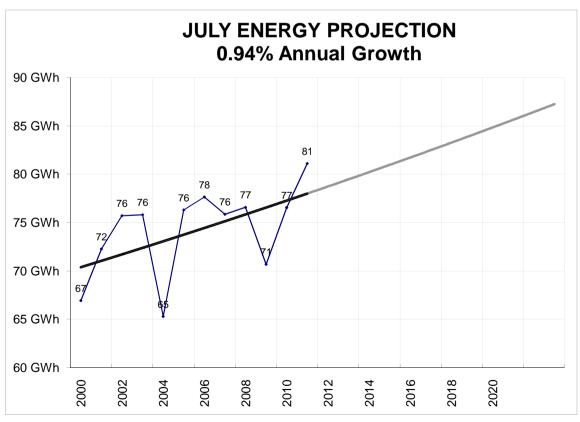


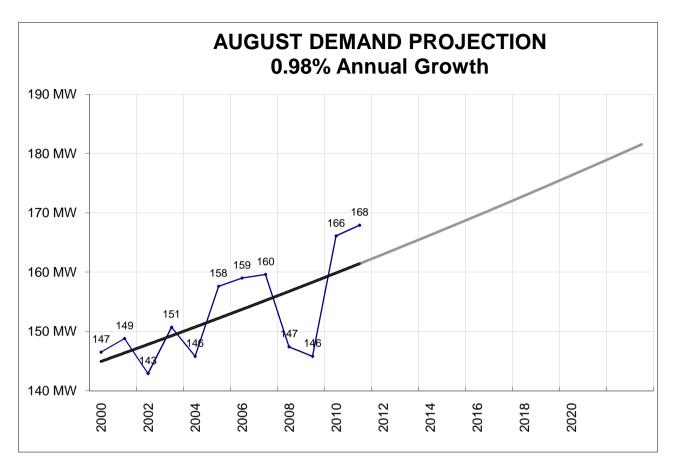


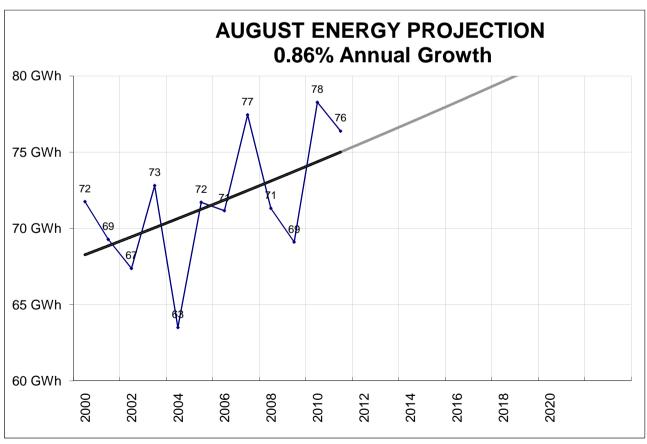


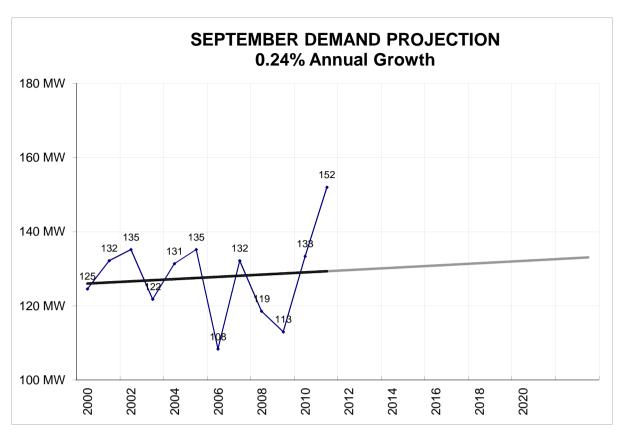


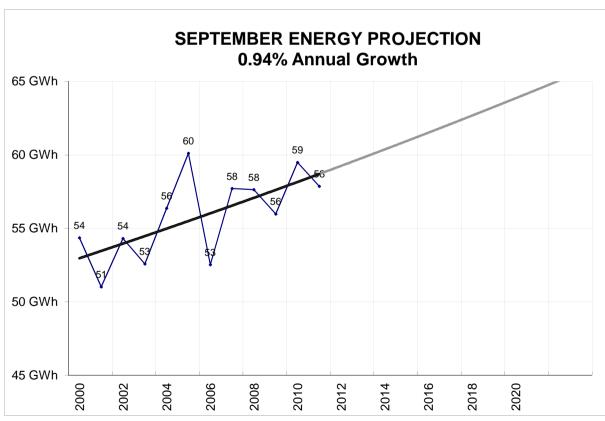


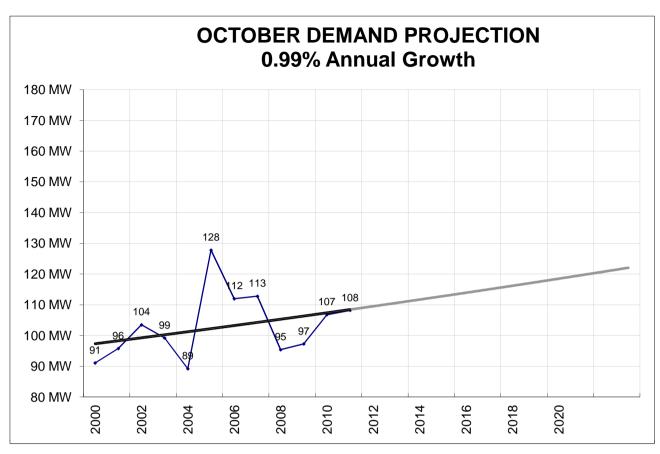


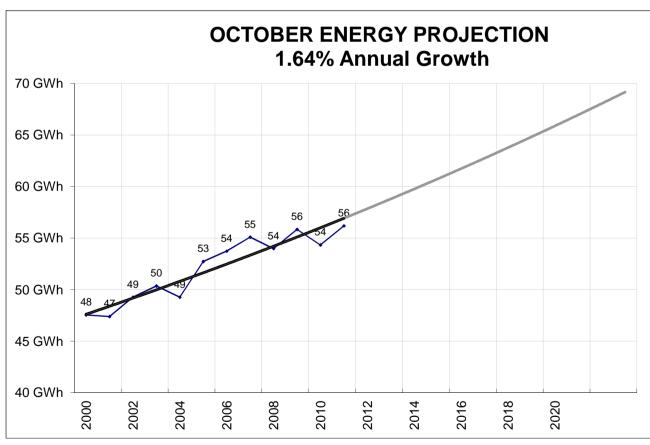


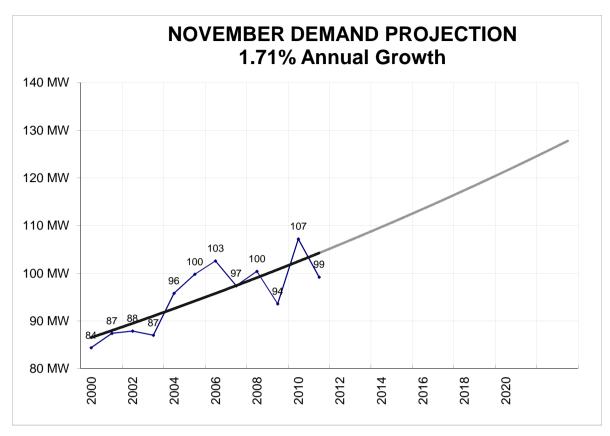

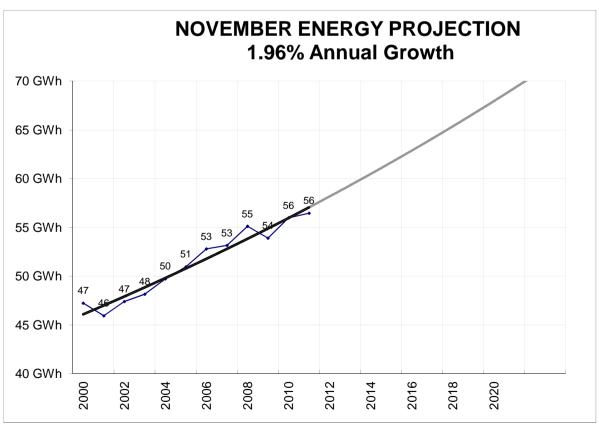

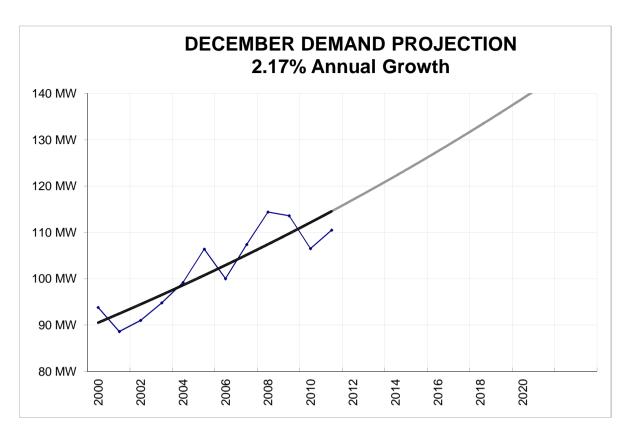

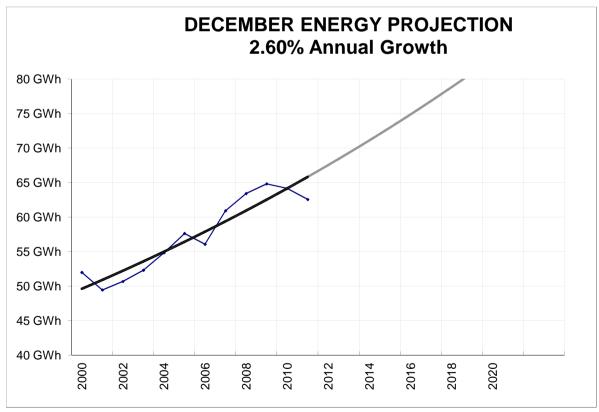

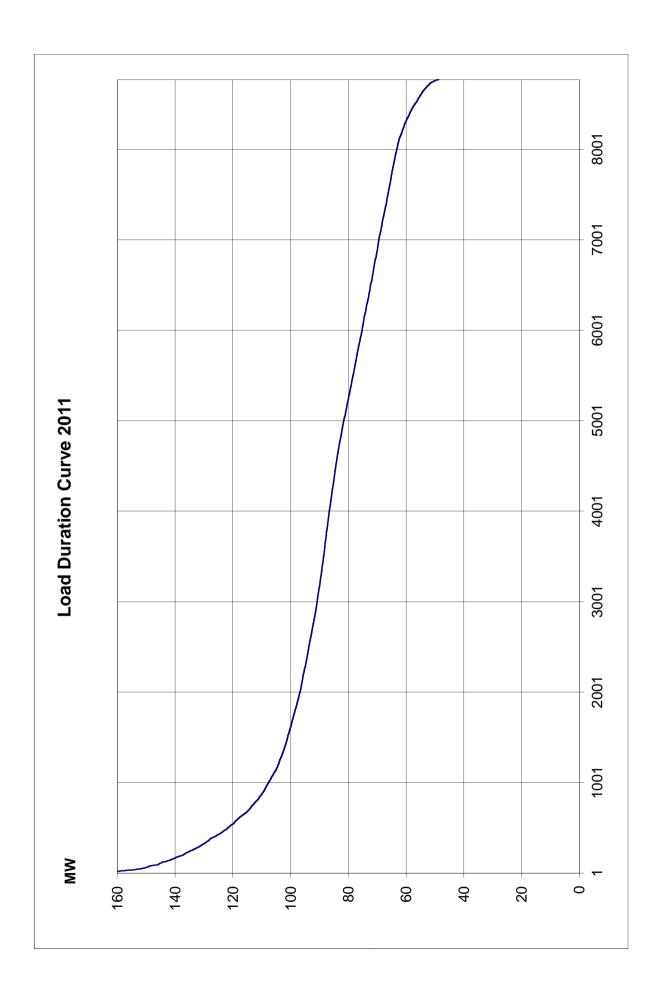

APPENDIX "B"

Grand Island Electric Department Reliability Statistics

2011

SAIDI

The **System Average Interruption Duration Index (SAIDI)** is commonly used as a reliability indicator by electric power utilities. SAIDI is the average unscheduled outage duration for each customer served, and is calculated as:

SAIDI = Sum of all customer interruption durations

Total number of customers served

SAIDI is measured in units of time per customer. It is usually measured over the course of a year. According to 2003 EPRI report entitled "Distribution Reliability Indices Tracking Within the United States", the national ten year average between 1992 and 2001 was 107 minutes per customer per year, **excluding** major events.

The City of Grand Island has a SAIDI value of approximately 18.44 minutes per year per customer, including all events.

SAIFI

The System Average Interruption Frequency Index (SAIFI) is commonly used as a reliability indicator by electric power utilities. SAIFI is the average number of unscheduled interruptions that customers experience, and is calculated as:

SAIFI = Total number of customer interruptions

Total number of customers served

SAIFI is measured in units of interruptions per customer. It is usually measured over the course of a year. According to the 2003 EPRI report entitled "Distribution Reliability Indices Tracking Within the United States", the national ten year average between 1992 and 2001 was 1.1 interruptions per customer per year, *excluding* major events.

The City of Grand Island has a year to date SAIFI value of approximately 0.56 interruptions per customer per year, with no major event exclusions.

CAIDI

The Customer Average Interruption Duration Index (CAIDI) is commonly used as a reliability indicator by electric power utilities. CAIDI represents the average time required to restore service to the average customer per sustained interruption, and is calculated as:

CAIDI = Sum of customer interruption durations

Total number of customer interruptions

CAIDI is measured in units of time per customer. It is usually measured over the course of a year. According to the 2003 EPRI report entitled "Distribution Reliability Indices Tracking Within the United States", the national ten year average between 1992 and 2001 was 97.27 minutes per customer per year, **excluding** major events.

The City of Grand Island has a year to date CAIDI value of approximately 32.8 minutes per customer per year, with no major event exclusions.

RESOLUTION 2012-131

WHEREAS, Grand Island Utilities Department receives an allocation of electric power from the federal hydro-power projects on the Missouri River; and

WHEREAS, this power allocation is administered by the federal Western Area Power Administration (WAPA); and

WHEREAS, by implementation of the Federal Energy Policy Act of 1992, the federal government prescribed methods and procedures which utilities must use for future power supply analysis; and

WHEREAS, such process is termed the "Integrated Resource Planning" process; and

WHEREAS, since 1996 the City of Grand Island has periodically prepared and submitted the required Integrated Resource Plans to the Western Area Power Administration in accordance with federal requirements; and

WHEREAS, the Utilities Department continues to be required to periodically submit an Integrated Resources Plan to the Western Area Power Administration; and

WHEREAS, the Integrated Resource Plan 2012 reviews the effects of past load growth and power supply analyses and looks to the future as the City of Grand Island's electrical demand continues to grow.

NOW, THEREFORE, BE IT RESOLVED BY THE MAYOR AND COUNCIL OF THE CITY OF GRAND ISLAND, NEBRASKA, that the Integrated Resource Plan is accepted and approved; and the Utilities Department is authorized to submit such plan to the Western Area Power Administration (WAPA) in accordance with federal requirements.

BE IT FURTHER RESOLVED that the Utilities Department is hereby authorized to proceed with the implementation of the Integrated Resource Plan.

- - -

Adopted by the	City Council	of the City of	f Grand Island	Nebraska M	[av 22 2012]
Audultu by the	City Council	or the City of	i Oranu isianu.	. INCUIASNA, IVI	1av 22. 2012.

Attest:	Jay Vavricek, Mayor
RaNae Edwards, City Clerk	Approved as to Form May 21, 2012 City Attorney